




SPRUNG AXLE ORDER FORM - LAND

NOW OR ORDERED		SALES ORDER #		
IBT PO NUMBER		INVOICE #		
Company		Salesman Initials	Date Ordered	Time
Name		Technician Initials	Date Needed	
Phone		Customer PO #	Time Needed	
Measured By Iron Bear: Initials _____ AND _____ OR Customer: Phone _____ Axle Tag #: _____				



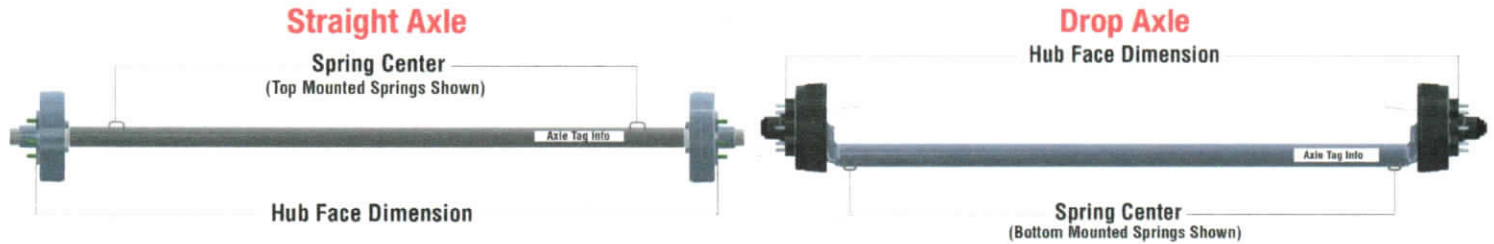

Quantity	2.2K 3.5K	7K - Standard	Capacity	9K 10KHD 12K 15K	Spring Pad
1 2 3	4.4K 5.2K	7K: 3" HW	8K: Narrow	10KGD: 9-44 Drum 10KGD: 9-123 Drum	2.5" (3-173) 3" (3-66)
4 5 6	6K 7.2K	7K: 3.5" HW	8K: 1/4" Wall	*All above only available with 4.75 Pilot <input type="checkbox"/>	Hutch (3-403) <input type="checkbox"/>
			8K: HW		

ROUND TUBE ONLY	Straight or Drop	Bearings	Type	Brakes
Tube Diameter 1.75" 2.38" 3" 3.5" 4" 5" <input type="checkbox"/>	4" Drop Straight <input type="checkbox"/> 6" Drop 2.2K & 3.5K only	Timken <input type="checkbox"/> Import <input type="checkbox"/>	Beam Idler <input type="checkbox"/> Brake <input type="checkbox"/>	NEVR Adjust Manual Hyd-Disc Air Hyd-Drum Hyd-Drum FB <input type="checkbox"/>

Flange	Hub Face	Spring Center	Bolt Pattern - 3.5K & Above			Bolt Pattern - 2.2K		
Oversize HF 96" <input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	5 on 4.5 5 on 4.75 5 on 5	440 34822-440	545 8-10" Wheel: 34822-545	545 12-15" Wheel: 008-258-05	<input type="checkbox"/>	<input type="checkbox"/>
			5 on 5.5 655 865 8 on 275MM					

Stud Size	7K 5/8" Stud or Oil Upgrade		3.5K Idler Upgrade		3.5K Drum Upgrade	
1/2" 9/16" 5/8" 3/4"	NOW 008-219-18 Grease	ORD Use Part Number 12DU <input type="checkbox"/>	NOW 845475-I 84550-I	ORD Use Part Number IU <input type="checkbox"/>	NOW 845476 84556	ORD Use Part Number 10DU <input type="checkbox"/>
	008-219-26 Oil		84555-I 84655-I		84557 84656	

Lubrication	Spring Pads		Basket Check
E-Z Lube Oil NEVR Lube Grease (solid caps) 092102: 2.2K & 3.5K 45896: 4.4K, 5.2K, 6K 38605: 7K, 7.2K, 8K <input type="checkbox"/>	Loose <input type="checkbox"/>	Underslung (Springs Under)  <input type="checkbox"/>	Overslung (Springs Over)  <input type="checkbox"/>
		Spring Pads Both <input type="checkbox"/>	Basket Check <input type="checkbox"/>

Flange Measurements	
2.2K Hub Face = Outside of flanges + 6.90 3.5K Hub Face = Outside of flanges + 6.34 4.4K Hub Face = Outside of flanges + 7.08 6K, 7K Hub Face = Outside of flanges + 8.73 7.2K Hub Face = Outside of flanges + 7.54	8K Hub Face = Outside of flanges + 9.09 10K GD (8-415 or 8-430 Hub, 9-123 Drum) = Outside of flanges + 10.98 10K GD (8-288 Hub or 9-44 Drum) = Outside of flanges + 13.50 12K E = Outside of flanges + 15.27 12K Disc = Outside of flanges + 14.35

Notes	Delivery Direction	U-Bolts	QTY 1 2 3
Ship LTL	North South	UBK-1.75S UBK-1.75L UBK-2.38S UBK-2.38L	UBK-3X1.75S (3-5 Leaf)
	East NE	UBK-3X1.75L (6-7 Leaf) UBK-3X2S (3-5 Leaf)	UBK-3X2L (6-7 Leaf)
	West Local	UBK-35 UBK-40 UBK-5X2.5 UBK-5X3	

Bold & Italics indicate Upgrades/Additional Charges